


DVD 5-9 / BD 25-50 Label Art Print Specification

Printable Area Shaded in Gray

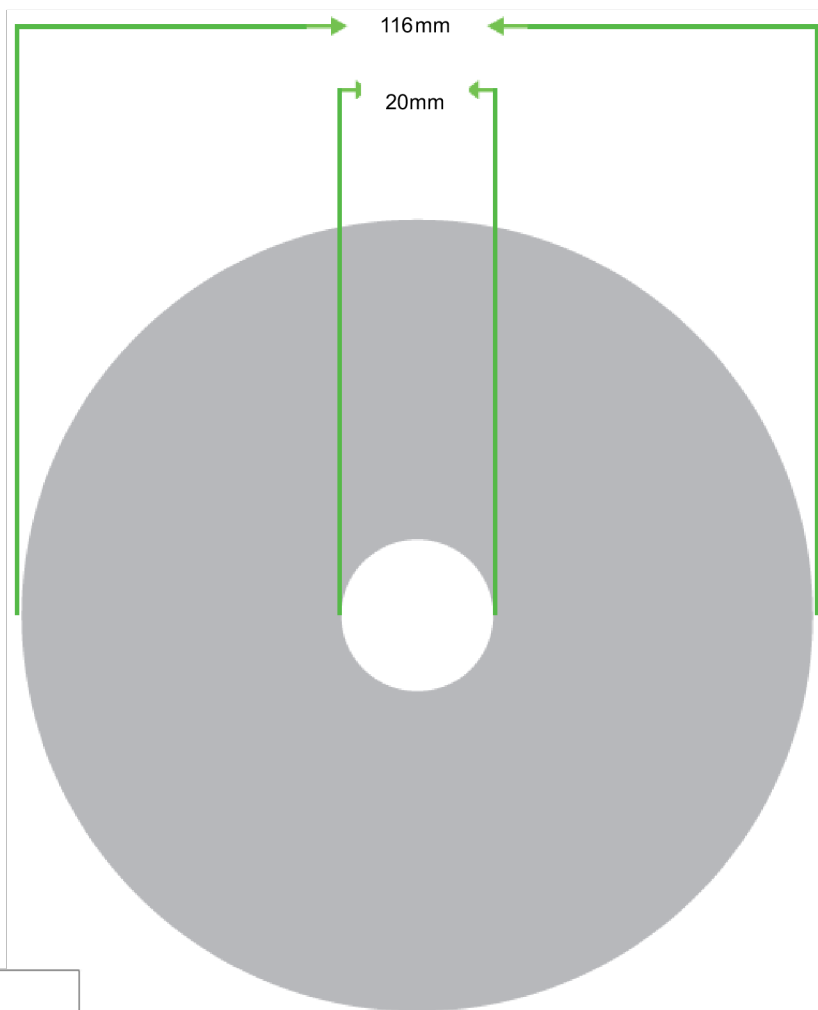

COLORS

C1

C2

C3

C4

C5

C6

WHITE

YES ☐ NO ☐

CUSTOM ☐

Total of Colors

X

ID ART: XXXXXXX

JOB TITLE: XXXXXXX

Quick Reference Label Art Specifications and Design Tips

- The shaded area of the image above represents the printable area. Do not deviate from the printable area.
- Minimum font point size: 6 pt. San Serif Font (ex. Helvetica)
- Minimum line width: 0.5 pt.
- Minimum line width knockout/reversed: 1.0 pt.
- Collect for output, all graphic elements (links) and fonts (printer and screen). Include sub-ordinate fonts used in linked graphic elements.
- Vantiva will trap your electronic files. If submitting film, apply a 0.35 pt. trap to all colors where registration is critical.
- Indicate all colors required. This includes white floods or custom white.

- If CUSTOM WHITE is required, please send the separation visible and specify 'Custom'.
- Specify all knockout elements and their final appearance. This will ensure Conectiv meets your desired finished product.
- Color-accurate proofs are required to ensure color and content accuracy.
- Image resolution (raster images) of 300 dpi or higher is required to ensure image quality. Re-link to your hi-resolution images when using FPOs.
- Vantiva respects all color profiles embedded in your design.
- Bleeds are encouraged when designing in Adobe Illustrator. Final masking and film/file output will take place within Adobe InDesign. Note: Do not create bleeds if designing fully using Adobe InDesign.